



T-STAR plus



Tellerkopf



4CUT




4CUT und Wellenprofil



Tellerkopf, T-STAR plus

4CUT,
gehärtet, gleitbeschichtet

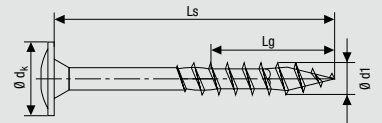

WIROX® P3J

Abmessungen [mm]				VE	SPAX-Nummer
Gewinde-Ø d1	Gesamt- länge Ls	Gewinde- länge Lg	Klingen- größe T	SPAX BOX [Stück]	
6,0 Ø dk = 13,6 mm	60	56 ■	30	200	0251750600605
	80	61 ■	30	100	0251750600805
	100	61 □	30	100	0251750601005
	120	68 □	30	100	0251750601205
	140	68 □	30	100	0251750601405
	160	65 □	30	100	0251750601605
	180	65 □	30	100	0251750601805

Weitere Längen, Kopfformen und Oberflächen auf Anfrage.

■ T-STAR plus, Vollgewinde

□ T-STAR plus, Teilgewinde




SPAX®
WIROX
 corrosion protection
 100
6x180
 0251750601805
 4 003530 178092
 CE 0672-OPD-1 14-12-17
 13
 DOP-1
 ETA-12/0114
 SPAX
 Z-8.1-235
 MPA

Tellerkopf, T-STAR plus

4CUT,
gehärtet, gleitbeschichtet


WIROX® P3J

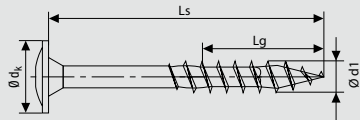

Abmessungen [mm]			VE	SPAX-Nummer	
Gewinde-Ø d1	Gesamt- länge	Gewinde- länge	Klingen- größe	SPAX BOX	SPAX-Nummer
	Ls	Lg	T		
8,0 Ø dk = 20 mm	80	70	■	50	0251750800805
	100	80	■	50	0251750801005
	120	80	■	40	0251750801205
	140	80	□	40	0251750801405
	160	80	□	40	0251750801605
	180	80	□	40	0251750801805
	200	80	□	40	0251750802005
	220	80	□	40	0251750802205
	240	80	□	40	0251750802405
	260	80	□	40	0251750802605
	280	80	□	40	0251750802805
	300	80	□	40	0251750803005
	320	80	□	40	0251750803205
	340	80	□	40	0251750803405
	360	80	□	40	0251750803605
	380	80	□	40	0251750803805
400	80	□	40	0251750804005	
450	80	□	40	25	0251750804505

Weitere Längen, Kopfformen und Oberflächen auf Anfrage.

- T-STAR plus, Vollgewinde
- T-STAR plus, Teilgewinde

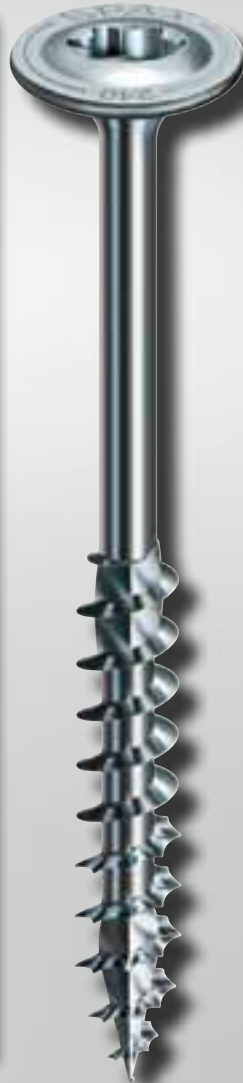

T-STAR plus



Tellerkopf



4CUT



4CUT und Wellenprofil

4CUT®

P&J

T40

SPAX®

WIROX®
corrosion protection

50

8x240

0251750802405

4 003530 178818

0672-CPD-1 14.12.17

ETA-12/0114

13 DoP 1

SPAX®
Z-9.1-449

